


ESLINGA DE POLIESTER ESLINGAR 2M X 300MM 20TN EN U 10TN EN TIRO DIRECTO
COLOR NARANJA COEFICIENTE CS7 - 60326044

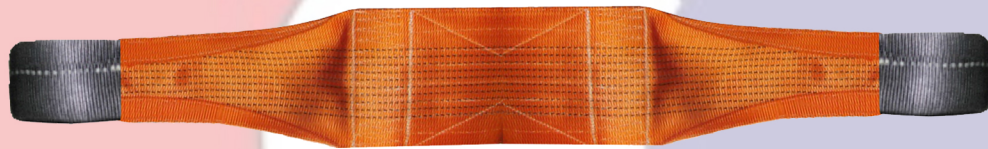

COLOR	OJAL (mm)	ANCHO (mm)	CARGA DE TRABAJO					CAPAS	TIRO DIRECTO	LAZO
			TIRO DIRECTO	LAZO	U	45°	60°			
	300	30	1000	800	2000	1400	1000	2		
	350	60	2000	1600	4000	2800	2000	2		
	400	90	3000	2400	6000	4200	3000	2		
	450	120	4000	3200	8000	5600	4000	2		
	500	150	5000	4000	10000	7000	5000	2		
	500	180	6000	4800	12000	8400	6000	2		
	600	240	8000	6400	16000	11200	8000	2		
	800	300	10000	8000	20000	14000	10000	2		

CARACTERISTICAS

- 01.** Fabricado según norma En1492/Iram 5378.
Líneas negras para identificación de carga.
- 02.** Patrón internacional de colores.

- 03.** Mejor absorción al golpe y distribución de carga.
Ojales protegidos según especificación.
- 04.** Livianas y fácil de almacenar, no rayan la carga.

DESCRIPCION / UTILIZACION

Eslinga de fibra sintética ojal ojal coeficiente 7.
 Utilizada para izaje y movimientos de carga en general.